

New Paddy Husker with Automatic Roll Reversing
Novo Descascador com Reversão Automática de Rolos

PADDY HUSKER

DESCASCADOR COM CÂMARA DE ASPIRAÇÃO DA CASCA

HR10DDF-T



HR10DDF-T

SATAKE CORPORATION

Satake has incorporated its unique Technologies into the New Paddy Husker HR10DDE for superior performance. A Satake incorporou suas tecnologias únicas no novo Descascador HR10DDE para um desempenho superior.

1. No Roll Reversal:
With the Idler Switching System and Automatic Adjustment, the new husker automatically stabilizes husking efficiency, and the reversing the rubber rolls within their usable lifetimes is no longer necessary.
1. Nenhuma Reversão de rolo:
Com a troca de velocidade e o ajuste automático, o novo descascador estabiliza automaticamente a eficiência do descascamento e a reversão dos roletes de borracha dentro de sua vida útil não é mais necessária.
2. Automatic Adjustment:
The Paddy Husker is equipped with an electronic regulator to ensure peak performance. It automatically adjusts the pressure of the roll air and maintains an optimum husking efficiency
2. Ajuste Automático:
O Descascador está equipado com um regulador eletrônico para garantir o máximo desempenho. Ajusta automaticamente à pressão do ar no rolo e mantém uma ótima eficiência de descascamento.

3. Timely Notification System:
When the rubber rolls run out, sensors control the alarm and stop the machine automatically.
3. Sistema de notificação oportuna:
Quando os rolos de borracha acabam, os sensores controlam o alarme e param a máquina automaticamente.

4. Immature Grain Outlet Available:
Models equipped with or an outlet for immature grains is also available.
- HU10DDF + HA10DFA= without outlet for immature grains
HU10DDF + HA10DFB= with outlet for immature grains
4. Saída de Grão Imaturo Disponível
Um modelo equipado com ou uma saída para grãos imaturos também está disponível.
- HU10DDF + HA10DFA= sem saída para grãos imaturos
HU10DDF + HA10DFB= com saída para grãos imaturos

5. Simple Operation:
The new Paddy Husker is controlled by an easy-to-use touch panel.
5. Operação Simples:
O novo descascador é controlado por um painel de toque fácil de usar
6. Easy Maintenance and Cleaning:
Careful design consideration has been given to ease of maintenance and cleaning.
6. Manutenção e limpeza fáceis:
Consideração cuidadosa de design adotada para facilitar a manutenção e limpeza.

* Specifications subject to change without previous notice.
* As especificações estão sujeitas a alterações sem aviso prévio


PADDY HUSKER DESCASCADOR COM CÂMARA DE ASPIRAÇÃO DA CASCA

Specification / Especificação		
MODEL / MODELO:		HR10DDF-T
Component (Husker & Aspirator)		HU10DDF-T + HA10DFA-T
Componentes (Descascador & Câmara de Aspiração)		HU10DDF-T + HA10DFB-T
Input Capacity Capacidade Entrada (T/h)	Short Grain Rice Arroz Curto	5,0 ~ 7,0
	Medium Grain Rice Arroz Medio	4,0 ~ 6,0
	Long Grain Rice Arroz Longo	3,0 ~ 5,0
	Basmati (Parboiled) Arroz Parbolizado	2,5 ~ 3,5
Required Power (KW) Energia		11,9 (HU:7,5 HA:3,7
Required Quantity of Motors (Unit)		7,5KW (6P) : 2
Quantidade Necessária de Motores (Un)		3,7KW (4P) : 1
* Husking rate and capacity vary depending on the material quality and machine setting.		
* A taxa e a capacidade de descasque variam de acordo com a qualidade do material e a configuração da máquina.		

Patented* Idler Switching System

*Japan, U.S., Thailand, India, China, Taiwan, Brazil, South Korea, and Vietnam

Automatically Change Speed

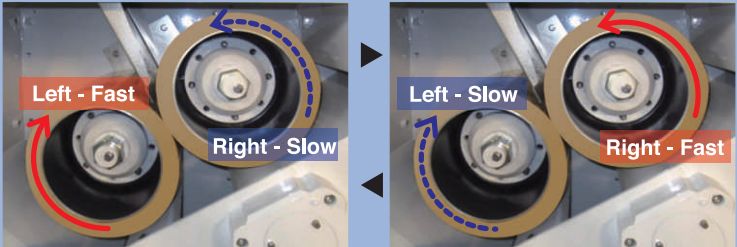

The Paddy Husker incorporates an Idler Switching System. The main and counter shaft speeds can be automatically interchanged. The husking ratio is stable at all times.

Dimensions / Dimensões

	W (mm)	L (mm)	H (mm)	Weight (kg)
HR10DDF-T	1,594	2,003	2,79	1,881
HU10DDF-T	1,264	1,224	1,54	980
HA10DFA-T	1,594	2,003	1,25	831
HA10DFB-T				

All copyright and trademark rights of this catalog belong to Satake Co., unless otherwise noted. Unauthorized copying, reprinting, etc. are forbidden. All Satake products are the subject of continuous development and, as a result, their specification may change and differ in detail from those shown.

SATAKE CORPORATION

Head Office 2-30 Saijo Nishihonmachi, Higashi-Hiroshima-shi, Hiroshima-ken, 739-8602, Japan URL : https://satake-group.com	Korea Branch Daekyo Building, 16F, 239, Daedeok-daero, Seo-gu, Daejeon, 35229, Korea URL : https://satake-group.com	SATAKE USA INC. 10900 Cash Road, Stafford, Texas, 77477, U.S.A. URL : www.satake-usa.com	SATAKE AMERICA LATINA LTDA. Rua Xavantes, 155-Pav. 20, Bairro Atiradores, CEP 89203-210, Joinville, Santa Catarina, Brazil URL : www.satake.com.br	SATAKE EUROPE LTD. Horsfield Way, Bredbury Industrial Park, Bredbury, Stockport, Cheshire, SK6 2SU, U.K. URL : www.satake-europe.com
SATAKE INDIA ENGINEERING PVT. LTD. 4th Floor, Tower-1, HB Twin Towers, A2, 3, 4, Netaji Subhash Place, Wazirpur District Centre, New Delhi, 110034, India URL : www.satakeindia.com	SATAKE (THAILAND) CO., LTD. 133,134 Moo 5, Bangkadi, Mueang Pathum Thani, Pathum Thani 12000, Thailand URL : www.satake-th.com	SATAKE ASIA CO., LTD. No. 101, True Digital Park Griffin Building, 14th Floor, Unit No. 1407, Sukhumvit Rd. Bangchak, Phra Khanong, Bangkok, 10260, Thailand URL : www.satake-th.com	PT. SATAKE GOBEL INDONESIA Gedung Surabaya Bumi Mandiri, Lantai 9, Jalan Jenderal Basuki Rachmat Nomor 129-137, Unit 905 B, Indonesia URL : www.satake-id.com	SATAKE VIETNAM CO., LTD. 1st Floor, Saigon Port Building, No. 03 Nguyen Tat Thanh Street, Ward 13, District 4, HCMC, Vietnam URL : https://satakevietnam.com
SATAKE MANUFACTURING (SUZHOU) CO., LTD. 229 Jin Feng Road, Suzhou New District, Suzhou City, Jiangsu Province, 215129, China URL : www.satake.cn	SATAKE AUSTRALIA PTY. LTD. 15 Leland Street, Penrith, N.S.W., 2750, Australia URL : www.satake.com.au	ISO 9001 Certification (Quality Management Systems) ISO 14001 Certification (Environmental Management Systems)		

SATAKE CORPORATION has obtained ISO9001 and ISO14001 certification. These international standards for management systems ensure Satake will continue to provide high quality products and services.